

MR-JE

Servo and Motion Control

High performance servo system
easy to use for all machines



Top-class level speed frequency response of 2.0 kHz



High resolution encoder (131072 pls/rev) for high performance



Easy to use with one-touch tuning



Compliance to global standards

Reliable performance and advanced ease-of-use



Apply servos to all machines with reliable basic performance and advanced ease-of-use!




The MR-JE series satisfies the needs of advanced driving control systems.

Mitsubishi Electric is introducing the new MR-JE series high performance servo amplifiers and servo motors. Combining proven reliability with a 2.0 kHz high-frequency response and an energy-saving design, they offer the best-in-class performance with the setup ease of advanced one-touch tuning. Fully compliant with global standards and ready for deployment worldwide, the MR-JE series is the right servo solution for all kinds of machines and applications.

Fast and accurate

■ Speed frequency response of 2.0 kHz

The top-level speed frequency response of 2.0 kHz shortens the settling time substantially, reducing the tact time of a machine.

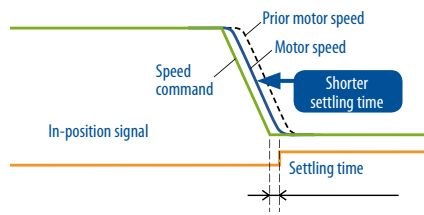

Settling time comparison with the prior model

■ Max. command pulse frequency of 4 Mpps

MR-JE-A having a general-purpose interface which is compatible with the maximum command pulse frequency of 4 Mpps, enabling smooth operation.

■ High System Performance by SSCNETIII/H

MR-JE-B is compatible with SSCNETIII/H, the optical servo system controller network that enables a high-response and multi-axis system with high synchronous performance and less wiring. In addition, absolute position detection system can be configured easily with the MR-JE-B servo amplifiers.

■ Accurate positioning


The servo motors are equipped with an incremental encoder of 131072 pulses/rev (17-bit) enables high accuracy positioning and smooth rotation.

By optimizing the combination of the number of motor poles and the number of slots, torque ripple during conduction is reduced to 1/4 as compared to the prior series. Smooth constant-velocity operation of a machine is achieved.

Easy high-precision tuning

■ Servo adjustment with only one touch

Servo gains including machine resonance suppression filter, advanced vibration suppression control II, and robust filter are adjusted just by pressing the buttons on the front of the servo amplifier. Machine performance is utilized to the fullest using the advanced vibration suppression.

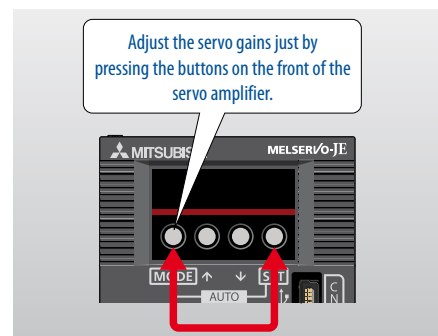


■ **Effective low frequency vibration suppression**

Due to vibration suppression algorithm which supports three-inertia system, two types of low frequency vibrations are suppressed at the same time. This function is effective in suppressing vibration at the end of an arm and in reducing residual vibration in a machine control function. Adjustment is performed on MR Configurator2.

High tolerance against Instantaneous Power Failure


The tolerance against instantaneous power failure is improved as the capacity of the main circuit capacitor is increased by 20 % from the prior model, reducing machine downtime and improving productivity.

The possibility of undervoltage alarm is reduced by limiting the torque when instantaneous power failure is detected in the main circuit power supply.

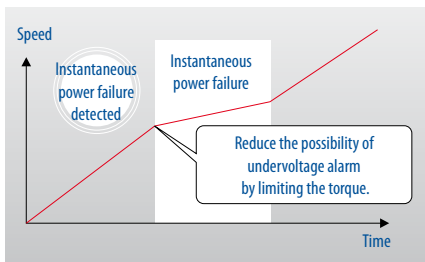

Easy monitoring and maintenance

Servo data such as motor current and position command before and after the alarm occurrence are stored in non-volatile memory of the servo amplifier. This function allows you to check the monitor values and the waveform of the past 16 alarms in the alarm history ((analog 16 bits × 7 channels + digital 8 channels) × 256 points) on MR Configurator2. The data read on MR Configurator2 help you to analyze the cause of the alarm.

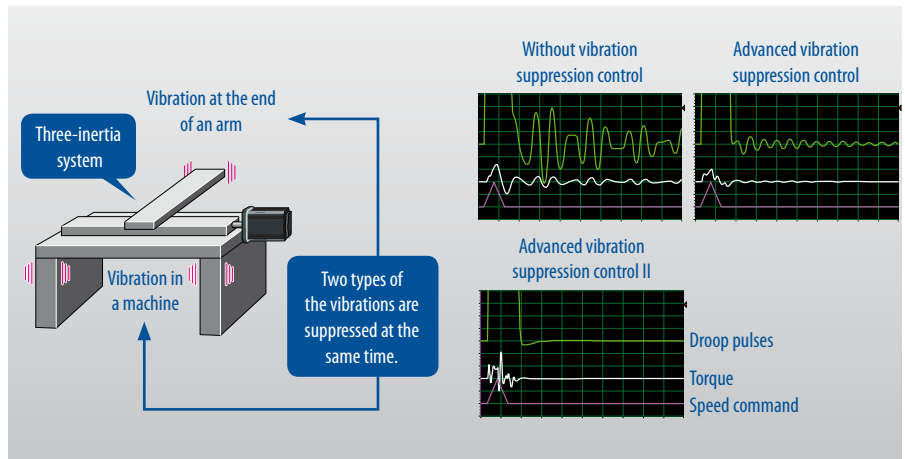

Effective low frequency vibration suppression

Eco-friendly performance

■ **Efficient utilization of regenerative energy**

Because the control circuit and the main circuit use a common power supply, the regenerative energy is also used for the control circuit, reducing waste in energy consumption.

■ **Power monitor supports energy saving**

The servo amplifier calculates the driving power, the regenerative energy, and the power consumption from the data such as speed and current. With MR Configurator2, the power consumption is monitored in real time. The Visualization of power consumption supports the energy conservation.


Motion network connection

MR-JE series servo amplifiers are available with a SSCNETIII/H interface (type MR-JE-B) and can be combined together with Simple Motion Modules which enable various motion commands including mark detection, electric cam and synchronous control.

Up to 16 axis servo amplifier axes can be connected per system and easily configured as a multi-axis system. With the technical advantages of SSCNETIII/H like deterministic and synchronized synchronisation, machines like packaging or food processing machines can be realized.

Simple start-up

Tuning, monitor display, diagnosis, reading/writing parameters, and test operations are easily performed on a standard personal computer with MR Configurator2. This start-up support tool makes tuning and diagnostics quick and easy and includes powerful graphical machine analysis and simulation functions. A stable machine system, optimum control, and short setup time are the result.

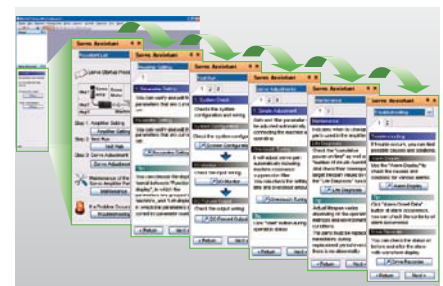

Just follow the the guidance and setup is complete

Global standards

To satisfy growing needs in driving control throughout the world, the MR-JE series complies with global standards.

The digital inputs/outputs are compatible with both sink and source type connections.



Specifications

Servo amplifier MR-JE Performance		10A/B ^③ 0.1 kW	20A/B ^③ 0.2 kW	40A/B ^③ 0.4 kW	70A/B ^③ 0.7 kW	100A/B ^③ 1 kW	200A/B ^③ 2 kW	300A/B ^③ 3 kW
Power supply input	Voltage/frequency ^①	3-phase or 1-phase 200–240V AC, 50/60 Hz				3-phase or 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz ^④		3-phase 200 V AC to 240 V AC, 50 Hz/60 Hz
Control method		Sinusoidal PWM control/current control system						
Dynamic brake		Built-in ^②						
MR-JE-A	Position control mode	Maximum input pulse frequency		4 Mpps (when using differential receiver), 200 kpps (when using open-collector)				
		Positioning feedback pulse		Encoder resolution: 131072 pulses/rev				
		Torque limit		Set by parameters or external analog input (0–10 V DC/maximum torque)				
	Speed control mode	Control range		Analog speed command 1:2000, internal speed command 1:5000				
		Speed fluctuation rate		±0.01 % maximum (load fluctuation: 0–100 %), 0 % (power fluctuation: ±10 %) ±0.2 % maximum (ambient temperature: 25 °C ±10 °C) only when using analog speed command				
		Torque limit		Set by parameters or external analog input (0–10 V DC/maximum torque)				
Torque control mode	Analog torque command input		0–±8 V DC/maximum torque (input impedance: 10–12 kΩ)					
	Speed limit		Set by parameters or external analog input (0–±10 V DC/rated speed)					
MR-JE-B	SSCNETIII/H command communication cycle	0.444 ms, 0.888 ms						
Protective functions		Overcurrent shutdown, regeneration overvoltage shutdown, overload shutdown (electronic thermal), encoder fault protection, regeneration fault protection, undervoltage/sudden power outage protection, overspeed protection, excess error protection						
Structure (IP)		Self-cooling, open (IP20)				Fan-cooling, open (IP20)		
Ambient temperature		Operation: 0–55 °C (no freezing); Storage: –20–65 °C (no freezing)						
Ambient humidity		Operation: 90 % RH maximum (no condensation); Storage: 90 % RH maximum (no condensation)						
Altitude		Elevation: 1000 m or less above sea level						
Weight	kg	0.8	0.8	0.8	1.5	1.5	2.1	2.1
Dimensions (WxHxD)	mm	50x156x135	50x156x135	50x156x135	70x156x185	70x156x185	90x156x195	90x156x195

① Rated output and speed of a servo motor are applicable when the servo amplifier, combined with the servo motor, is operated within the specified power supply voltage and frequency.

② When using the built-in dynamic brake, refer to "MR-JE-A Servo Amplifier Instruction Manual" / "MR-JE-B Servo Amplifier Instruction Manual" for the permissible load to motor inertia ratio.

③ Type A without network connection, type B with SSCNETIII/H interface.

④ When 1-phase 200 V AC to 240 V AC power supply is used, use the servo amplifiers with 75 % or less of the effective load ratio.

Servo motor series	Speed [rpm]	Rated output capacity [kW]	Rated torque [Nm]	Type	Feature	Amplifier assignment MR-JE							
						10A/B ^⑤	20A/B ^⑤	40A/B ^⑤	70A/B ^⑤	100A/B ^⑤	200A/B ^⑤	300A/B ^⑤	
HG-KN	Rated: 3000 Maximum: 5000	0.1	0.32	HG-KN13(B)	Low inertia, small capacity	●							
		0.2	0.64	HG-KN23K(B)			●						
		0.4	1.3	HG-KN43K(B)				●					
HG-SN	Rated: 2000 Maximum: 3000	0.7	2.4	HG-KN73(B)JK	Medium inertia, medium capacity				●				
		0.5	2.4	HG-SN52(B)JK					●				
		1.0	4.8	HG-SN102(B)JK						●			
		1.5	7.2	HG-SN152(B)JK							●		
		2.0	9.6	HG-SN202(B)JK								●	
		3.0	14.3	HG-SN302(B)JK ^⑥								●	

(B) = with electromagnetic brake

⑤ Type A without network connection, type B with SSCNETIII/H interface.

⑥ Maximum speed: 2500 rpm

European Offices

Mitsubishi Electric Europe B.V. Gothaer Straße 8 D-40880 Ratingen Phone: +49 (0)2102 / 486-0	Germany	Mitsubishi Electric (Russia) LLC 52, bld. 1 Kosmodamianskaya emb. RU-115054 Moscow Phone: +7 495 / 721 2070	Russia
Mitsubishi Electric Europe B.V. Radlická 751/13e Avenir Business Park CZ-158 00 Praha 5 Phone: +420 251 551 470	Czech Rep.	Mitsubishi Electric Europe B.V. Carretera de Rubí 76-80 Apdo. 420 E-08190 Sant Cugat del Valles (Barcelona) Phone: +34 (0) 93 / 5653131	Spain
Mitsubishi Electric Europe B.V. 25, Boulevard des Bouvets F-92741 Nanterre Cedex Phone: +33 (0)1 / 55 68 55 68	France	Mitsubishi Electric Europe B.V. (Scandinavia) Fjellvegøen 8 SE-22736 Lund Phone: +46 (0) 8 625 10 00	Sweden
Mitsubishi Electric Europe B.V. Viale Colonna 7 Palazzo Siro I-20864 Agrate Brianza (MB) Phone: +39 039 / 60 53 1	Italy	Mitsubishi Electric Turkey Elektrik Ürünleri A.Ş. Serifali Mahallesi Nutuk Sokak No:5 TR-34775 Ümraniye-İSTANBUL Phone: +90 (0)216 / 526 39 90	Turkey
Mitsubishi Electric Europe B.V. Westgate Business Park, Ballymount IRL-Dublin 24 Phone: +353 (0)1 4198800	Ireland	Mitsubishi Electric Europe B.V. Travellers Lane UK-Hatfield, Herts. AL10 8XB Phone: +44 (0)1707 / 28 87 80	UK
Mitsubishi Electric Europe B.V. Nijverheidsweg 23a NL-3641RP Mijdrecht Phone: +31 (0) 297250350	Netherlands	Mitsubishi Electric Europe B.V. Dubai Silicon Oasis United Arab Emirates - Dubai Phone: +971 4 3724716	UAE
Mitsubishi Electric Europe B.V. ul. Krakowska 50 PL-32-083 Balice Phone: +48 (0) 12 347 65 00	Poland		

Representatives

GEVA Wiener Straße 89 A-2500 Baden Phone: +43 (0)2252 / 85 55 20	Austria	Beijer Electronics A/S Lyksegardsvej 17 DK-4000 Roskilde Phone: +45 (0)46 / 75 76 66	Denmark	Beijer Electronics SIA Ritausma iela 23 LV-1058 Riga Phone: +371 (0)6 / 784 2280	Latvia	Sirius Trading & Services Aleea Lacul Morii Nr. 3 RO-060841 Bucuresti, Sector 6 Phone: +40 (0)21 / 430 40 06	Romania	SHERF Motion Techn. Ltd. Rehov Hamekava 19 IL-58851 Holon Phone: +972 (0)3 / 559 54 62	Israel
000 TECHNIKON Prospect Nezavisnosti 177-9 BY-220125 Minsk Phone: +375 (0)17 / 393 1177	Belarus	HANS FOLSGAARD A/S Theilgaard Torv 1 DK-4600 Køge Phone: +45 4320 8600	Denmark	Beijer Electronics UAB Goštautu g. 3 LT-48324 Kaunas Phone: +370 37 262707	Lithuania	INEA SR d.o.o. Ul. Karadiorjeva 12/217 SER-11300 Smederevo Phone: +386 (0)26 461 54 01	Serbia	CEG LIBAN Cebaco Center/Block A Autostrade DORA Lebanon-Beirut Phone: +961 (0)1 / 240 445	Lebanon
ESCO DRIVES Culliganlaan 3 BE-1831 Diegem Phone: +32 (0)2 / 717 64 60	Belgium	Beijer Electronics Eesti OÜ Pärnu mnt.160i EE-11317 Tallinn Phone: +358 (0)6 / 51 81 40	Estonia	ALFATRADE Ltd. 99, Paola Hill Malta-Paola PLA 1702 Phone: +356 (0)21 / 697 816	Malta	SIMAP SK Jána Derku 1671 SK-911 01 Trenčín Phone: +421 (0)32 743 0472	Slovakia	ADROIT TECHNOLOGIES Cebaco Center/Block A Autostrade DORA ZA-Fourways Phone: +27 (0)11 / 658 8100	South Africa
KONING & HARTMAN B.V. Vanhuwelaan 31 BE-1800 Wilvoorde Phone: +32 (0)2 / 257 02 40	Belgium	Beijer Electronics OY Vanha Nurmijärventie 62 FIN-01670 Vantaa Phone: +358 (0)207 / 463 500	Finland	INTEHESIS SRL bld. Traian 23/1 MD-2060 Kishinev Phone: +373 (0)22 / 66 4242	Moldova	INEA RBT d.o.o. Stegne 11 SI-1000 Ljubljana Phone: +386 (0)1 / 513 8116	Slovenia	Beijer Electronics Automation AB Box 426 SE-20124 Malmö Phone: +46 (0)40 / 35 86 00	Sweden
INEA RBT d.o.o. Stegne 11 SI-1000 Ljubljana Phone: +386 (0)1 / 513 8116	Bosnia and Herzegovina	PROVENDOR OY Vanha Nurmijärventie 62 FIN-28130 Pori Phone: +358 (0)2 / 522 3300	Finland	HIFLEX AUTOM. B.V. Wolvenstraat 22 NL-2984 CD Ridderkerk Phone: +31 (0)180 / 46 60 04	Netherlands	Beijer Electronics Automation AB Box 426 SE-20124 Malmö Phone: +46 (0)40 / 35 86 00	Sweden		
AKHNATON 4, Andrei Lipachev Blvd., P.O. Box 21 BG-1756 Sofia Phone: +359 (0)2 / 817 6000	Bulgaria	UTECO A.B.E.E. 5, Mavrogenous Str. GR-18542 Piraeus Phone: +359 (0)211 / 1206-900	Greece	KONING & HARTMAN B.V. NL-2627 AP Delft Phone: +31 (0)15 260 99 06	Netherlands	OMN RAY AG Im Schörl 5 CH-8000 Dübendorf Phone: +41 (0)44 / 802 28 80	Switzerland		
INEA CR Losinjka 4 a HR-10000 Zagreb Phone: +385 (0)1 / 36 940 - 017 - 02 / -03	Croatia	MELTRADE Kft. Fertő utca 14. HU-1107 Budapest Phone: +36 (0)1 / 431-9726	Hungary	Beijer Electronics AS Postboks 487 NO-3002 Drammen Phone: +47 (0)32 / 24 30 00	Norway	OOO "CSC-AUTOMATION" 4-B, M. Raskovoy St. UA-02660 Kiev Phone: +380 (0)44 / 494 33 44	Ukraine		
Kafkova 1853/3 CZ-702 00 Ostrava 2 Phone: +420 595 691 150	Czech Republic	TOO Kazpromavtomatika Ul. Zhambyla 28 KAZ-100017 Karaganda Phone: +7 7212 / 50 10 00	Kazakhstan	Fonseca S.A. R. João Francisco do Casal 87/89 PT-3801-997 Aveiro, Esqueira Phone: +351 (0)234 / 303 900	Portugal				



Mitsubishi Electric Europe B.V. / FA - European Business Group / Gothaer Straße 8 / D-40880 Ratingen / Germany / Tel.: +49(0)2102-4860 / Fax: +49(0)2102-4861120 / info@mitsubishi-automation.com / https://eu3a.mitsubishielectric.com

Art. no. 272742-B / 02.2015 / Specifications subject to change / All trademarks and copyrights acknowledged.

